

Notice

1. Only for use with Babymore Peanut Isofix Base.
2. This is an ISOFIX CHILD RESTRAINT SYSTEM. It is approved to ECE Regulation No.44,04 series of amendments for Semi-universal use in vehicles fitted with ISOFIX anchorages systems.
3. It fits vehicles with positions approved as ISOFIX positions (as detailed in the vehicle handbook), depending on the category of the child seat and of the fixture.
4. The mass group and the ISOFIX size class for which this device is intended is: 0-13KG and D.

This child restraint is classified for (Semi-universal) use and is suitable for fixing into the seat positions of the following cars:


CAR	FRONT	REAR	
CARLIST	Outer	Outer	Centre
	No	Yes	No

Seat positions in other cars may also be suitable to accept this child restraint. If in doubt, consult either the child restraint manufacturer or the retailer.

Thank you for purchasing Babymore, If you need assistance.
Call: +442034755588 or email: customerservices@babymore.co.uk
Babymore, Unit C2 Zenith Industry Estate, Paycocke Road, Basildon,
Essex, UK, SS14 3DW

Peanut Isofix Base Peanut Group 0+ Rear Facing Car Seat

USER MANUAL

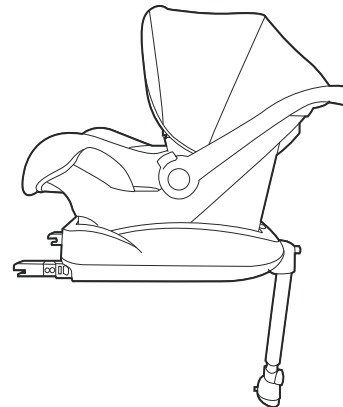

Approved under ECER44/04
GROUP 0+ Suitable for newborn to 13kg

Babymore
more for your baby

P44/V1/19 Babymore

Contents

1.Applicability.....	3
2.Safety instructions.....	4
3.Parts and interior equipment.....	5
4.ISOFIX installation instructions.....	6
5.Adjust the carrying handle.....	8
6.Correct securing your baby.....	8
6.1.Setting the shoulder belt height.....	8
6.2.Adjust the shoulder straps.....	9
6.3.Securing the baby with the harness.....	9
6.4.The use of buckle.....	10
7.Care and Maintenance.....	11
7.1.Remove the fabric cover.....	11
7.2.Cleaning of the fabric cover.....	11
7.3.Care and Maintenance.....	11
8.What to do after an accident.....	11

WARNING

The following brief instructions are intended to provide only an overview. In order to achieve maximum security and comfort for your child it is absolutely imperative that you read the whole instruction manual carefully.

1. Applicability


The baby car seat is suitable for age Group 0+(up to 13kg)

Group 0+:Newborn-13kg



DO NOT put the baby car seat on seats on which a front airbag is activated.

- Only suitable for vehicle seats with a three point automatic belt, approved under ECE regulation no R.16 or equivalent standard.

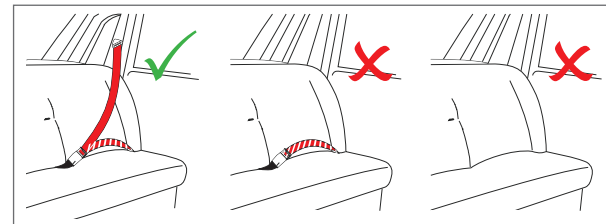


2. Safety instructions



In order to achieve maximum security and comfort for your child, please read the whole instruction manual carefully, to avoid any misuse or carelessness use.

- Always keep this Instruction Manual with car seat;
- Do not put this baby car seat on any seat with activated airbags;
- The baby car seat must be installed rearwards facing(the child's feet point towards to the backrest of the vehicle seat);
- This baby car seat can only be installed using a three-point vehicle belt;
- Before every journey, always check the baby car seat is installed correctly ;
- Do not or attempt to change any original components and accessory parts;
- Always strap your baby into the car seat and never loose sign of your baby;
- Do not leave your baby unattended in the vehicle;
- Never use the baby car seat as a hopping bag or as a means for transporting something;
- Protect the child restraint system against direct sun light to prevent high temperature from damage;
- The child car seat must not be used without the cover;
- Ensure that all the parts are locked in place correctly;
- Luggage or other objects liable to cause injuries in the event of collision shall be properly secured;
- The modifications or additions are not allowed to be made to this car seat without approval of professionals. Repairs are only allowed to be undertaken by persons who have been authorized to do so;
- Periodically inspect the restrict system, pay particular attention to the points of attachment, stitching and adjusting devices;

- Do not continue to use the child car seat if parts have become damaged or been loosened;
- The handle of the baby car seat must to be against the back of the vehicle seat;
- The infant car seat must always be secured with the vehicle seat even when not being used;
- Care has to be taken to only use an original hoodthis car seat cover because the cover is also an essential functional component. Spare covers can be obtained from your specialist retailer;
- The plastic parts of the infant car seat heat up in the sun. Your baby can suffer burns from this. Protect your baby and the infant car seat from intense sun exposure(e.g by placing a light cloth cover the seat)

3.Parts and interior equipment.

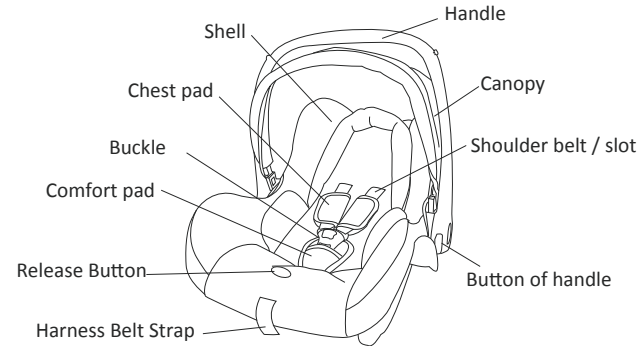

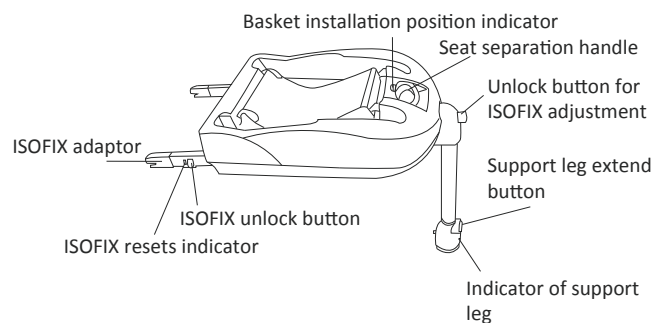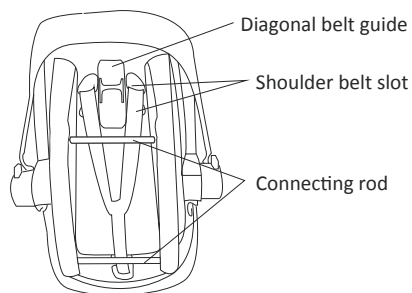

4. ISOFIX Base Installation instructions

Step 1. Please fully open ISOFIX support legs outward. (Fig.1)

Step 2. Position the base on ISOFIX vehicle seat. (Fig.2)

Step 3. Hold the button first, then popping ISOFIX adaptor. Aim the ISOFIX connector to ISOFIX fixed groove of car. Then push connector to the fixed groove till “kaka” sound heard. (Fig.3)

Step 4. When ISOFIX connector installed correctly, the indicator of ISOFIX port shows green, when the indicator turn red, please loosen connector and install again. (Fig.4)




Fig.1

“OPEN”




Fig.2




Fig.3




Fig.4

5. Adjust the handle

- The handle for the baby car seat can be adjusted into 4 positions.
- To adjust the handle, please press the button of handle on both side at the same time, now it can be rotated.
- **Adjust the handle of the baby car seat when locking to suitable position and check if it is securely locked.**




Fig.1



Fig.2



Fig.3





Fig.4


6. Correct securing your baby

6.1. Setting the shoulder belt height

Check whether the shoulder belts be at the right height for your child. The shoulder belts should be at shoulder height or just above.



If the height of shoulder belts in child car seat is not fit for child, Adjust the height of the shoulder belts, please proceed as follows:



Step 1: loosen the shoulder harness (see point 6.2).

Step 2: Pull out the buckle tongues from the chest pad and the slots on the cover and the shell, then thread them into the corresponding belt slots.

- **Ensure that both of the shoulder belts go through slots at the same height, and not twisted.**


6.2. Adjust the shoulder straps



- The shoulder straps are released by pressing the lever (under the seat cover) on the front of the seat.
- Press down on the label marked "Press" as you trip the two shoulder straps with your other hand, pull to adjust it.

6.3. Securing the baby with the harness

1. Firstly, adjust the shoulder belt height (see point 6.1)
2. Adjust the shoulder straps (see point 6.2), open the buckle, and place them down sideways. Seat your child in the child car seat. Place both shoulder straps over your child's shoulders.
3. Lock the buckle tightly.
4. Ensure that the straps are close to the shoulder of the child by pulling the straps tightly.



- The harness should be adjusted as tightly as possible without causing discomfort to your child.
- It is dangerous not to tighten the straps. Check the adjuster and ensure the straps are pulled tightly, not twisted after each use.

6.4.The use of buckle

- 1.Put the two metal sections of the buckle connectors together (fig.1).
- 2.Slot the two buckle connectors into the slot in the top of the buckle until they “click” into place (fig.2).
- 3.Check the harness is correctly locked by pulling the shoulder straps upwards (fig.3).
- 4.To release the harness, press the red button on the buckle downwards.




Fig.1




Fig.2



Fig.3

7.Care and Maintenance

7.1.Remove the fabric cover

Step 1:First pull out the harness from the seat.

Step 2:Undo the press button on the handle, then remove the canopy from backwards.

Step 3:Loosen the elastic, remove the fabric cover from upwards.

• Follow the steps described above but in reverse order in order to re-fasten the cover.

7.2 Cleaning of the fabric cover

Use only neutral detergent and warm water to wash the fabric cover.Do not wash it by machine,spin-dry or tumble-dry are not recommended.

THIS COVER SHOULD BE HAND WASH



7.3.Care and Maintenance

- 1.Please regularly check the function and spare parts of the baby car seat are in good condition to provide the maximum protection.
- 2.Before using, please check the locking fastness of the buckle by pulling in effort the straps and see whether the buckle is loose or not.
- 3.Do not use the baby car seat in cold,wet or hot circumstance for a long time.

8.What to do after an accident

Please change the seat without fail after an accident.