

### **Notice**

1. This is a "Universal" child restraint; it is approved to ECE Regulation 44.04 for general use in vehicles and will fit most, but not all, vehicle seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this group.
3. This child restraint has been declared "Universal" under more stringent conditions than those applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

Only suitable if the vehicle is fitted with -point static, 3-point retractor safety belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

### **WARNING**

**DO NOT** place rear-facing child seat on front seats with activated airbags.

Thank you for purchasing Babymore, If you need assistance.  
Call: +442034755588 or email: [customerservices@babymore.co.uk](mailto:customerservices@babymore.co.uk)  
[www.babymore.co.uk](http://www.babymore.co.uk)

## **Peanut Group 0+ Rear Facing Car Seat**

### **USER MANUAL**



Approved under ECER44/04  
GROUP 0+ Suitable for newborn to 13kg

**Babymore**  
more for your baby

P44/V1/19 Babymore

## Contents

1. Applicability.....	3
2. Safety instruction .....	4
3. Parts and interior equipment.....	5
4. General use.....	6
4.1. Adjusting the carrying handle. ....	6
5. Installation in ca .....	7
6. Correct securing your baby.....	8
6.1. Setting the shoulder belt heig .....	8
6.2. Adjust the shoulder straps.....	9
6.3. Securing the baby with the harness.....	9
6.4. The use of buckle.....	10
7. Care and Maintenance.....	11
7.1. Remove the fabric cover.....	11
7.2. Cleaning of the fabric cover.....	11
7.3. Care and Maintenance.....	11
8. What to do after an accident .....	11

## NOTES

The following brief instructions are in ended to provide only an overview. In order to achieve maximum security and comfort for your child it is absolutely imperative that you read the whole instruction manual carefully.

### 1. Applicability


The baby car seat is suitable for age Group 0+ (up to 13kg)

*Group 0+: Newborn-13kg*



**DO NOT** put the baby car seat on seats on which a front airbag is activated

- Only suitable for vehicle seats with a three point automatic belt, approved under ECE regulation no R.16 or equivalent standard

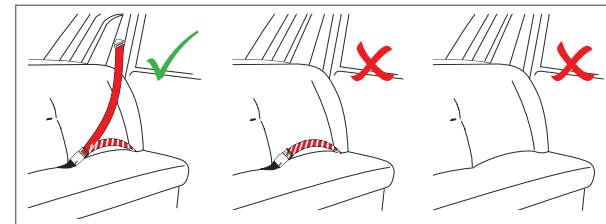


## 2. Safety instruction

**In order to achieve maximum security and comfort for your child, please read the whole instruction manual carefully, to avoid any misuse or carelessness use.**

- Always keep this Instruction Manual with car seat
- Do not put this baby car seat on seats with activated airbags
- The baby car seat must be installed rearwards facing(the child's feet point towards to the backrest of the vehicle seat;
- This baby car seat can only be installed using a three-point vehicle belt;
- Before every journey, always check the baby car seat is installed correctly ;
- Do not or attempt to change any original components and accessory parts;
- Always strap your baby into the car seat and never loose sign of your baby;
- Do not leave your baby unattended in the vehicle
- Never use the baby car seat as a hopping bag or as a means for transporting something
- Protect the child restraint system against direct sun light to prevent high temperature from hurt;
- The child car seat must not be used without the cover;
- Ensure that all the parts are locked in place correctly;
- Luggage or other objects liable to cause injuries in the event of collision shall be properly secured;
- The modifications or additions are not allowed to be made to thi car seat without approval of brand owner. Repairs are only allowed to be undertaken by persons who have been authorized to do so;
- Periodically inspect the restrict system, pay particular attention the points of attachment, stitching and adjusting devic


- Do not continue to use the child car seat if parts have become damaged or been loosened;
- The handle of the baby car seat must to be against the back of the vehicle seat;
- The infant car seat must always be secured with the vehicle seat even when not being used;
- Care has to be taken to only use an original this car seat cover because the cover is also an essential functional component. Spar covers can be obtained from your specialist retailer;
- The plastic parts of the infant car seat heat up in the sun. Your baby can suffer burns from this. Protect your baby and the infant car seat from intense sun exposure(e.g by placing a light cloth cover the seat)

## 3.Parts and interior equipment.

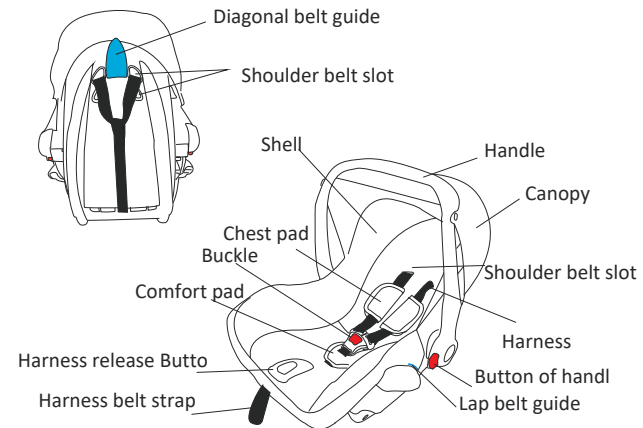

## 4.General Use

### 4.1.Adjusting the carrying handle



- You can lock the carrying handle into 4 positions.
- To adjust the carrying handle, please simultaneously press the red button on both sides.
- Then rotate the carrying handle until it automatically locks in the place in the desired position



Fig.1



Fig.2



Fig.3




Fig.4

**Fig. 1:** Vehicle and carrying position, Place the infant car seat facing the rear of the vehicle on the vehicle seat (the child's feet point towards to the backrest of the vehicle seat).

**Fig. 2:** Straight up for carrying.

**Fig.3:** Handle clicked back to initiate the rocking feature

**Fig.4:** Handle clicked down for upright sitting position, for putting inside.

- Always strap your child in with the integrated belt system and make sure the handle is locked in right position

## 5.Installation in ca

- Please read the instruction manuals in order to protect all passengers
- Do not put this infant car seat on a seat with activated front airbag
- The infant car seat can be suitable for vehicle seats with a three point automatic belt
- The infant baby car seat must be installed rearward facing( the child's feet point towards to the backrest of the vehicle seat).




Fig.1



Fig.2




Fig.3




Fig.4



Fig.5

**Step 1.** Ensure the carrying handle in the forward position(Fig.1)

**Step 2.** Put the infant car seat in vehicle's seat(Fig.2), put the infant car seat against the backrest of the vehicle seat.

**Step 3.** Slide the lap belt of the vehicle's 3-point seat belt through both lap belt guides. Let the tongue plate snap in the belt lock with a clearly audible "click". Pull the shoulder belt in narrow direction to tighten the lap belt. Check to make sure the tongue plate is locked by pulling on the belt(Fig.3).

**Step 4.** Place the diagonal belt in the diagonal belt guide at the back of the seat. rotate the handle of the seat to the appropriate place in the car.(Hearing "click") Be sure the handle has been locked and it should be firmly against the backrest of vehicle's seat.

**Step 5.** Tighten the vehicle's own 3-point seat belt by pulling hard on the positions showed in fig.5.

- **Attention:**The handle of the seat must be firmly installed againsts the backrest of car seat.
- You can release the child if you act the above steps in reversal ways.
- Make sure all the belts' position is right and not been twisted. Also check that the cover is not impeding the movement or fit of the belt webbing in any way.
- The satisfactory position of the adult safety-belt buckle relative to the child car seat is incorrect as the Fig 6. Fig.7 You can contact the child car seat manufacturer if in doubt about this point.




Fig.6





Fig.7


## 6. Correct securing your baby

### 6.1. Setting the shoulder belt height

Check whether the shoulder belts be at the right height for your child. The should belts should be at shoulder height or just above.



If the height of your shoulder belts in infant car seat is not fit for your child, adjust the height of the shoulder belts, please proceed as follows:




**Step 1:**loosen the shoulder harness (see point 6.2).

**Step 2:**Pull out the buckle tongues from the chest pad and the slots on the cover and the shell, then thread them into the corresponding belt slots.

- Ensure that both of the shoulder belts go through slots at the same height, and not twisted.


### 6.2. Adjust the shoulder straps



- The shoulder straps are slackened by pressing the lever (under the seat cover) on the front of the seat.
- Press down on the label marked "Press" as you grip the two shoulder straps with your other hand. Pull the shoulder straps towards you to loosen it.

### 6.3. Securing the baby with the harness

1. Firstly, adjust the shoulder straps height (see point 6.1), proceed as follows.
2. Loosen the harness (see point 6.2), open the buckle, and place them down sideways. put your child in the child car seat. Place both shoulder straps over your child's shoulders.
3. Lock the buckle tightly
4. Ensure that the straps are close to the shoulder of the child by pulling the straps tightly



- The harness should be adjusted as tightly as possible without causing discomfort to your child.
- It is dangerous not to tighten the straps. Check the adjuster and be sure that the straps are pulled tightly, not twisted after installation every time.

#### 6.4. The use of buckle

1. Put the two metal sections of the buckle connectors together (fig.1)
2. Slot the two buckle connectors into the slot in the top of the buckle until hearing "click" (fig.2)
3. Check the harness is correctly locked by pulling the shoulder straps upwards (fig.3).
4. To release the harness, press the red button on the buckle downwards.




Fig.1




Fig.2



Fig.3

### 7. Care and Maintenance

#### 7.1. Remove the fabric cover

**Step 1:** First pull out the harness from the seat.

**Step 2:** Undo the press button on the handle, then remove the canopy from backwards.

**Step 3:** Loosen the elastic, remove the fabric cover from upwards

• Follow the steps described above but in reverse order in order to re-fasten the cover.

#### 7.2 Cleaning of the fabric cover

Use only neutral detergent and warm water to wash the fabric cover. Do not wash it by machine, spin-dry or tumble-dry are not recommended.

THIS COVER SHOULD BE HAND WASH



#### 7.3. Care and Maintenance

1. Please regularly check the function and spare parts of the baby car seat are in good condition to provide the maximum protection
2. Before using, please check the locking fastness of the buckle by pulling in effort the straps and see whether the buckle is loose or not.
3. Do not use the baby car seat in cold, wet or hot circumstance for a long time

#### 8. What to do after an accident

Please change the seat without fail after an accident.